


Thread Turning Toolholders and Kits




Contents:	Page:	Contents:	Page:
Product Identification	42	Gang Toolholders	49
External Toolholders	43	Quick Change	
External Toolholders with Top Clamp	44	External Toolholders	50
Vertical Toolholders	44	Internal Toolholders	51
Slim Throat Toolholders	44	Special Thread Turning Application	52
External Thread Turning Toolholder	45	Large Profile Range	52
Internal Toolholders	46	Thread Helix Angle	53
Internal Toolholders with Coolant Bore	47	Standard and Slanted Anvils	53
Internal Toolholders with Top Clamp	47	Anvil Kits	54
Toolholders with 3.5° Helix Angle	47	Standard Kits	55
Carbide Shank Boring Bars	48	Miniature & Ultra-miniature Kits	55
Drophead Toolholders	48	Inserts' Kits	56
Vertical Toolholders	49	Threading & Boring Combination Kit	57

Product Identification

Threading Toolholders Ordering Codes

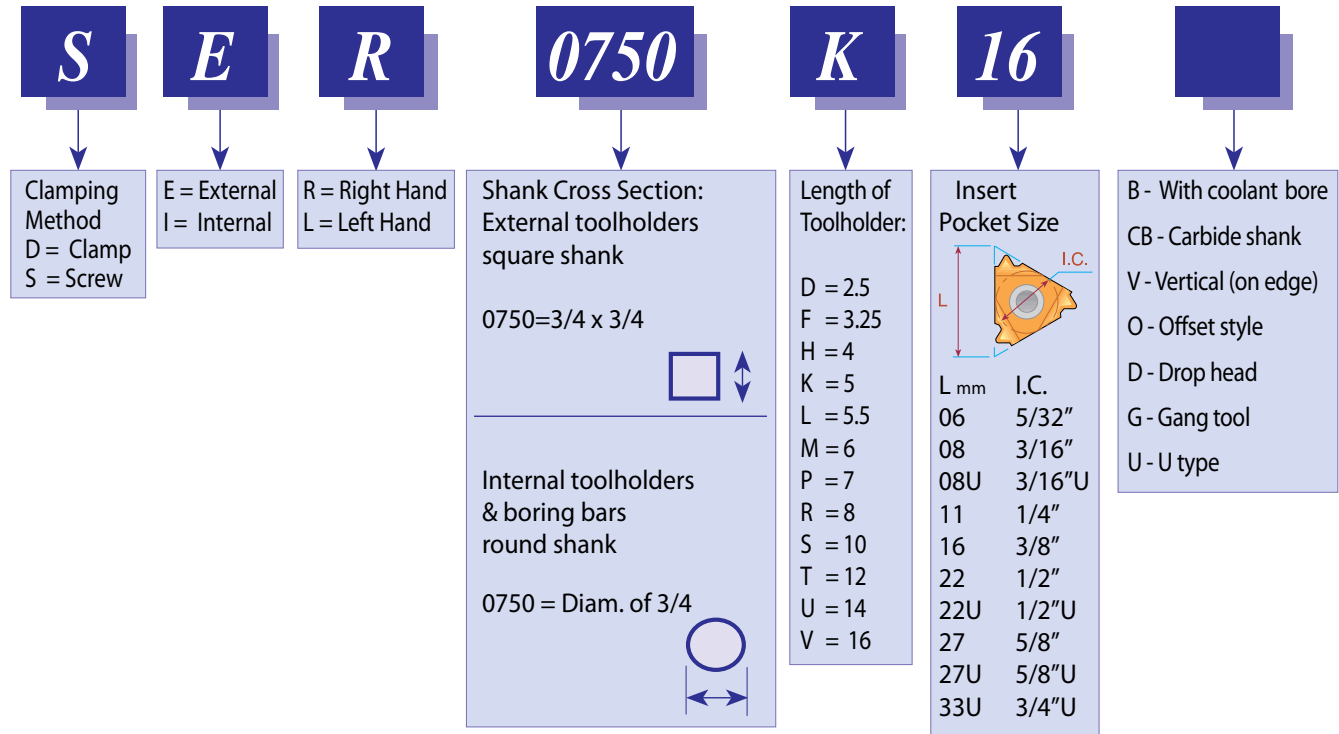

External Toolholders

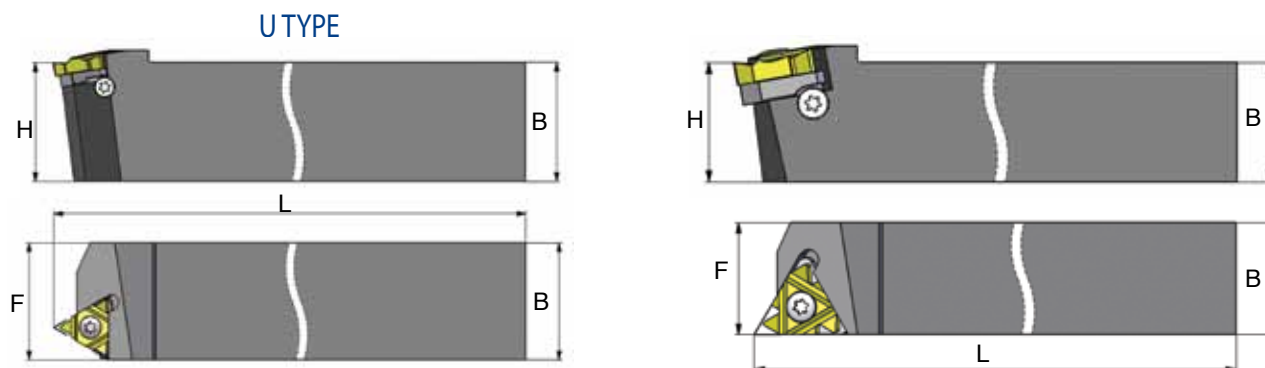

Ordering Code Right Hand	 L mm	B=H	L	F	Insert Screw	Anvil Screw	Torx Key	RH Anvil	LH Anvil
*SER 0310 H11	11	.31	4.00	.43	S11	-	K11	-	-
*SER 0375 H11	11	.38	4.00	.43	S11	-	K11	-	-
SER 0375 D16	16	.38	2.50	.63	S16	A16	K16	AE16	AI16
SER 0500 F16	16	.50	3.25	.63	S16	A16	K16	AE16	AI16
SER 0625 H16	16	.63	4.00	.63	S16	A16	K16	AE16	AI16
SER 0750 K16	16	.75	5.00	.75	S16	A16	K16	AE16	AI16
SER 1000 M16	16	1.00	6.00	1.00	S16	A16	K16	AE16	AI16
SER 1250 P16	16	1.25	7.00	1.25	S16	A16	K16	AE16	AI16
SER 1000 M22	22	1.00	6.00	1.00	S22	A22	K22	AE22	AI22
SER 1250 P22	22	1.25	7.00	1.25	S22	A22	K22	AE22	AI22
SER 1500 R22	22	1.50	8.00	1.50	S22	A22	K22	AE22	AI22
SER 1000 M22U	22U	1.00	6.00	1.10	S22	A22	K22	AE22U	AI22U
SER 1250 P22U	22U	1.25	7.00	1.25	S22	A22	K22	AE22U	AI22U
SER 1500 R22U	22U	1.50	8.00	1.50	S22	A22	K22	AE22U	AI22U
SER 1000 M27	27	1.00	6.00	1.25	S27	A27	K27	AE27	AI27
SER 1250 P27	27	1.25	7.00	1.25	S27	A27	K27	AE27	AI27
SER 1500 R27	27	1.50	8.00	1.50	S27	A27	K27	AE27	AI27
SER 1000 M27U	27U	1.00	6.00	1.25	S27	A27	K27	AE27U	AI27U
SER 1250 P27U	27U	1.25	7.00	1.25	S27	A27	K27	AE27U	AI27U
SER 1500 R27U	27U	1.50	8.00	1.50	S27	A27	K27	AE27U	AI27U
SER 1000 M33U	33U	1.00	6.00	1.45	S33	-	K33	-	-
SER 1250 P33U	33U	1.25	7.00	1.45	S33	-	K33	-	-


*Toolholders with no anvil


For **LEFT HAND** toolholders specify **SEL** instead of **SER**

Toolholders are made with a **1.5° Helix Angle**. For other Helix Angles please consult helix angle chart (page 71) in the technical section of this catalog.

33U holders do not have an anvil.

External toolholders with top clamp

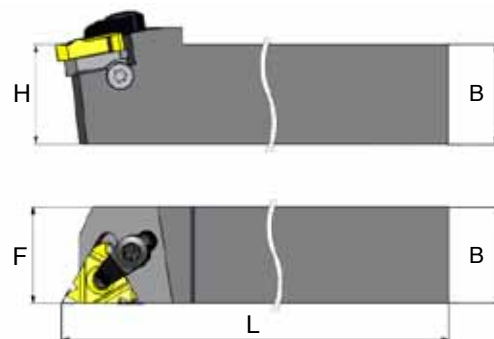


Ordering Code Right Hand	 L mm	B=H	L	F	Insert Screw	Clamp	Anvil Screw	Torx Key	RH Anvil	LH Anvil
DER 0750 K16	16	.75	5.0	.75	S16	C16	A16S	K16	AE16	AI16
DER 1000 M16	16	1.00	6.0	1.00	S16	C16	A16S	K16	AE16	AI16
*DER 1000 M22	22	1.00	6.0	1.00	S22	C22	A22	K22	AE22	AI22

For **LEFT HAND** toolholders specify **DEL** instead of **DER**

Toolholders are made with a **1.5° Helix Angle**. For other Helix Angles please consult helix angle chart in the technical section of this catalog.


Two clamping methods can be used: screw or top clamp.

*Use K21 torx key for C22 clamp

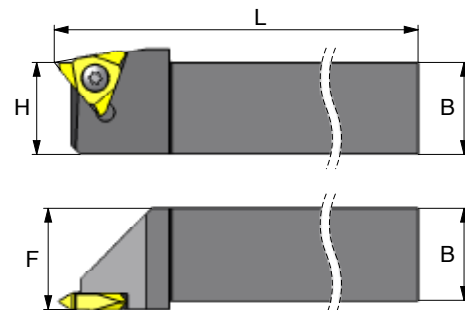



Vertical toolholders



Ordering Code Right Hand	 mm	B=H	L	F	Insert Screw	Torx Key
SER 0750 K16V	16	.75	5.0	.87	S16S	K16
SER 1000 M16V	16	1.00	6.0	1.06	S16S	K16
SER 1000 M22V	22	1.00	6.0	1.08	S22S	K22
SER 1000 M27V-T10	27	1.00	6.0	1.42	S27	K27
SER 1000 M27V-ABUT 4/3-T10	27	1.00	6.0	1.42	S27	K27
SER 1250 P27V-T10	27	1.25	7.0	1.42	S27	K27
SER 1250 P27V-ABUT 4/3-T10	27	1.25	7.0	1.42	S27	K27

Slim Throat toolholders

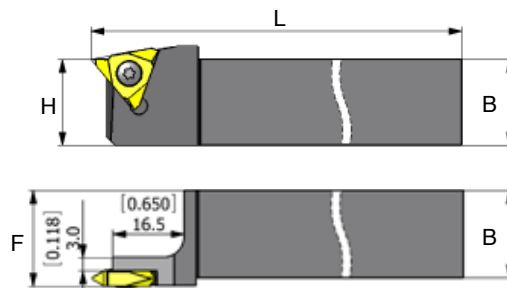

Ordering Code Right Hand	 mm	B=H	L	F	Insert Screw	Torx Key
SER 0625 H16VS	16	0.63	4.0	0.71	S16S	K16
SER 0750 K16VS	16	0.75	5.0	0.87	S16S	K16
SER 1000 M16VS	16	1.00	6.0	1.06	S16S	K16



External Thread Turning Toolholder with Internal Coolant


Carmex has developed a unique external thread turning holder with internal coolant to the cutting edge.

The holder includes two connecting options through an elbow fitting and a top clamp directing the coolant flow to the cutting edge.

The coolant flow provides:

- Better chip control, and chip flow
- Longer tool life and high performance
- Reduces the cutting edge temperature
- Available RH and LH tool holders
- Coated holders provide abrasive resistance

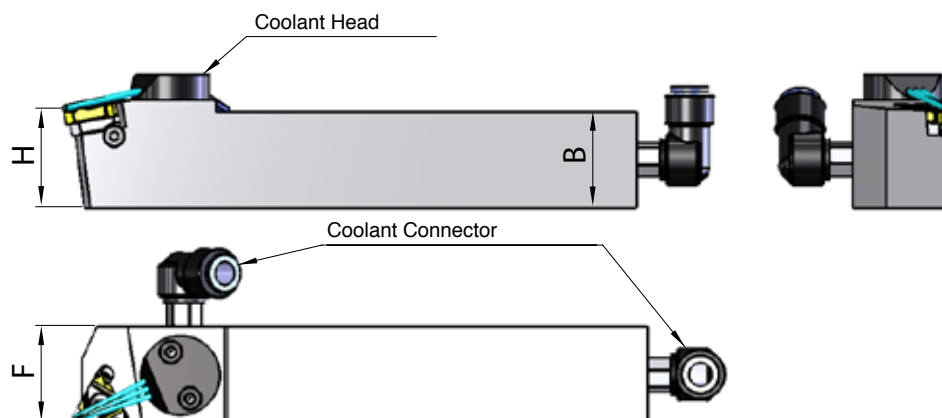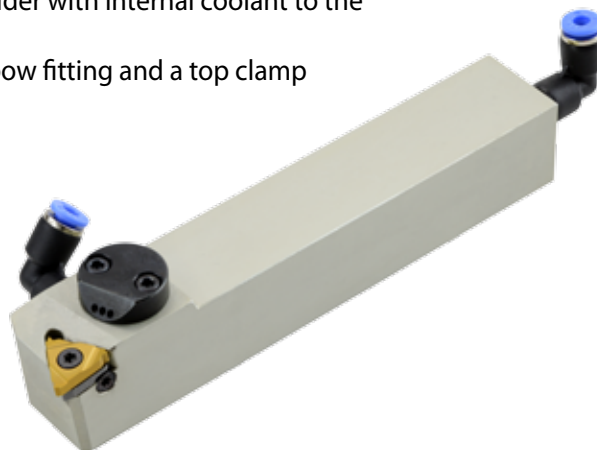

Ordering Code	 L mm	B=H	L	F	Torx + Insert Screw	Torx + Anvil Screw	Torx + Key	RH Anvil	LH Anvil	Coolant* Connector mm
SER 0750 K16B	16	.75	5.00	.75	S16P	A16P	K16P	AE16	AI16	Ø4 / Ø6
SER 1000 M16B	16	1.00	6.00	1.00	S16P	A16P	K16P	AE16	AI16	Ø4 / Ø6
SER 1000 M22B	22	1.00	6.00	1.00	S22P	A22P	K22P	AE22	AI16	Ø4 / Ø6
SER 1000 M27B	27	1.00	6.00	1.25	S27P	A27P	K27P	AE27	AI27	Ø4 / Ø6
SER 1250 P16B	16	1.25	7.00	1.25	S16P	A16P	K16P	AE16	AI16	Ø4 / Ø6
SER 1250 P22B	22	1.25	7.00	1.25	S22P	A22P	K22P	AE22	AI22	Ø4 / Ø6
SER 1250 P27B	27	1.25	7.00	1.25	S27P	A27P	K27P	AE27	AI27	Ø4 / Ø6


For **LEFT HAND** toolholders specify **SEL** instead of **SER**


Toolholders made with 1.5° helix angle

Please consult the helix angle chart page 71 in the technical section of this catalog

* Standard packing with Ø6 mm

Internal Toolholders

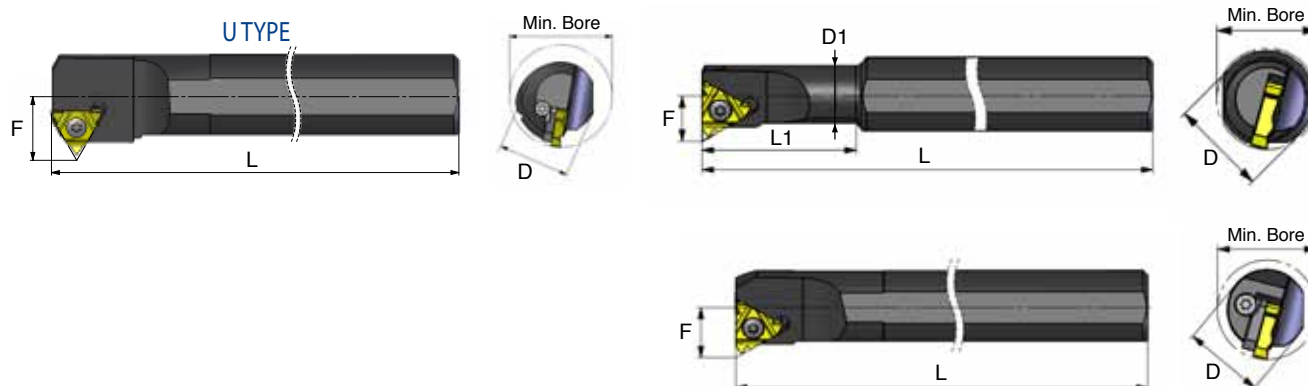


Ordering Code Right Hand	 L mm	D	D1	Min Bore Diam.	L	L1	F	Insert Screw	Anvil Screw	Torx Key	RH Anvil	LH Anvil
*SIR 0205 H06	6	.50	.20	.24	4.0	.47	.17	S06	-	K06	-	-
*SIR 0265 K08	8	.62	.26	.31	5.0	.70	.21	S08	-	K08	-	-
*SIR 0310 K08U	8U	.62	.29	.35	5.0	.83	.26	S08	-	K08	-	-
*SIR 0375 H11	11	.38	.38	.47	4.0	-	.28	S11	-	K11	-	-
*SIR 0375 K11	11	.62	.38	.47	5.0	1.00	.28	S11	-	K11	-	-
*SIR 0500 L11	11	.62	.50	.58	5.5	1.25	.34	S11	-	K11	-	-
*SIR 0500 M16	16	.62	.50	.64	6.0	1.25	.39	S16S	-	K16	-	-
*SIR 0625 P16	16	.75	.62	.75	7.0	1.57	.45	S16S	-	K16	-	-
SIR 0750 P16	16	.75	.75	.90	7.0	-	.51	S16	A16	K16	AI16	AE16
SIR 1000 R16	16	1.00	1.00	1.16	8.0	-	.65	S16	A16	K16	AI16	AE16
SIR 1250 S16	16	1.25	1.25	1.40	10.0	-	.77	S16	A16	K16	AI16	AE16
SIR 1500 T16	16	1.50	1.50	1.65	12.0	-	.90	S16	A16	K16	AI16	AE16
*SIR 0750 P22	22	.75	.75	.90	7.0	-	.59	S22S	-	K22	-	-
SIR 1000 R22	22	1.00	1.00	1.16	8.0	-	.71	S22	A22	K22	AI22	AE22
SIR 1250 S22	22	1.25	1.25	1.50	10.0	-	.85	S22	A22	K22	AI22	AE22
SIR 1500 T22	22	1.50	1.50	1.75	12.0	-	.98	S22	A22	K22	AI22	AE22
SIR 1250 S22U	22U	1.25	1.25	1.50	10.0	-	.95	S22	A22	K22	AI22U	AE22U
SIR 1500 T22U	22U	1.50	1.50	1.75	12.0	-	1.08	S22	A22	K22	AI22U	AE22U
SIR 1250 S27	27	1.25	1.25	1.56	10.0	-	.88	S27	A27	K27	AI27	AE27
SIR 1500 T27	27	1.50	1.50	1.80	12.0	-	1.00	S27	A27	K27	AI27	AE27
SIR 2000 U27	27	2.00	2.00	2.30	14.0	-	1.25	S27	A27	K27	AI27	AE27
SIR 2500 V27	27	2.50	2.50	2.80	16.0	-	1.50	S27	A27	K27	AI27	AE27
SIR 1250 S27U	27U	1.25	1.25	1.56	10.0	-	1.00	S27	A27	K27	AI27U	AE27U
SIR 1500 T27U	27U	1.50	1.50	1.80	12.0	-	1.13	S27	A27	K27	AI27U	AE27U
SIR 2000 U27U	27U	2.00	2.00	2.30	14.0	-	1.37	S27	A27	K27	AI27U	AE27U
SIR 2500 V27U	27U	2.50	2.50	2.80	16.0	-	1.61	S27	A27	K27	AI27U	AE27U
*SIR 2000 U33U	33U	2.00	2.00	2.50	14.0	-	1.50	S33	-	K33	-	-


*Toolholders with no anvil

For **LEFT HAND** toolholders specify **SIL** instead of **SIR**

Toolholders are made with a **1.5° Helix Angle**. For other Helix Angles please consult helix angle chart (page 71) in the technical section of this catalog.

Internal toolholders with coolant bore

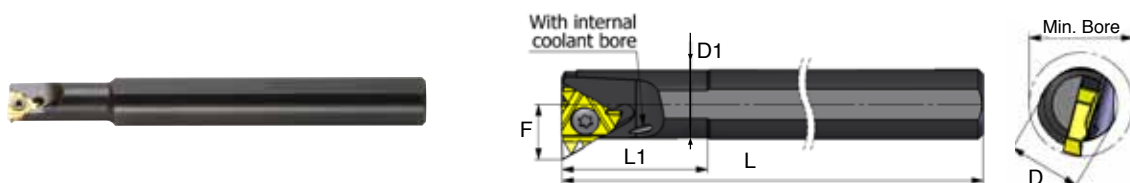


Ordering Code Right Hand	 L mm	D	D1	Min Bore Diam.	L	L1	F	Insert Screw	Anvil Screw	Torx Key	RH Anvil	LH Anvil
*SIR 0375 K11B	11	.62	.38	.47	5.0	.98	.28	S11	-	K11	-	-
*SIR 0500 M16B	16	.62	.50	.64	6.0	1.26	.39	S16S	-	K16	-	-
*SIR 0625 P16B	16	.75	.63	.75	7.0	1.57	.45	S16S	-	K16	-	-
SIR 0750 P16B	16	.75	.75	.90	7.0	-	.90	S16	A16	K16	AI16	AE16
SIR 1000 R16B	16	1.00	1.00	1.16	8.0	-	.65	S16	A16	K16	AI16	AE16
SIR 1000 R22B	22	1.00	1.00	1.16	8.0	-	.71	S22	A22	K22	AI22	AE22


*Toolholders with no anvil

For **LEFT HAND** toolholders specify **SIL** instead of **SIR**

Toolholders are made with a **1.5° Helix Angle**. For other Helix Angles please consult helix angle chart (page 71) in the technical section of this catalog.

Internal toolholders with top clamp

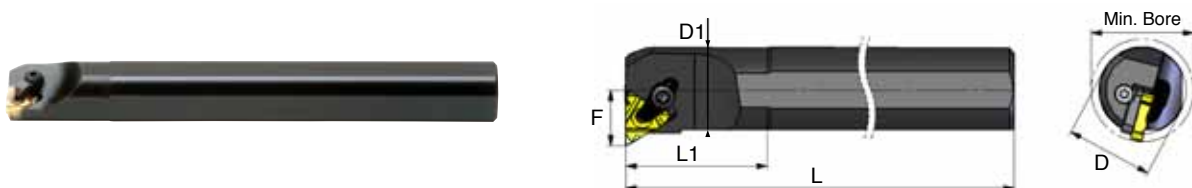

Ordering Code Right Hand	 L mm	D	D1	Min Bore Diam.	L	L1	F	Insert Screw	Clamp	Anvil Screw	Torx Key	RH Anvil	LH Anvil
DIR 0750 P16	16	.75	.75	.90	7.0	-	.51	S16	C16	A16S	K16	AI16	AE16
DIR 1000 R16	16	1.00	1.00	1.16	8.0	-	.65	S16	C16	A16S	K16	AI16	AE16
DIR 1250 S16	16	1.25	1.25	1.40	10.0	-	.77	S16	C16	A16S	K16	AI16	AE16
* DIR 1000 R22	22	1.00	1.00	1.16	8.0	-	.71	S22	C22	A22	K22	AI22	AE22

For **LEFT HAND** toolholders specify **DIL** instead of **DIR**

Two clamping methods can be used: screw or top clamp.

*Use K21 torx key for C22 clamp


Toolholders with 3.5° Helix Angle


Ordering Code Right Hand	 L mm	D mm	D1 mm	Min Bore Diam. mm	L mm	L1 mm	F mm	Insert Screw	Torx Key
SIR 0016 P16B-3.5	16	20	16	19	170	40	13.7	S16S	K16
SIR 0020 P22B-3.5	22	20	20	24	170	-	15.6	S22S	K22

For **LEFT HAND** toolholders specify **SIL** instead of **SIR**

Carbide Shank Threading Bars With coolant bore

Carbide Shank Threading Bars are used when Chatter and deflection are expected due to long overhang in deep small bores.

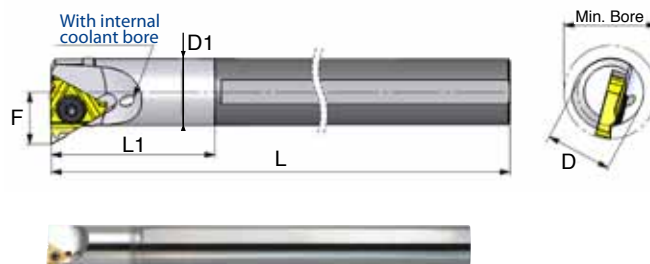



Ordering Code Right Hand	 L mm	D	D1	Min Bore Diam.	L	L1	F	Insert Screw	Anvil Screw	Torx Key	RH Anvil	LH Anvil
SIR 0205 H06CB	6	.25	.20	.24	4.0	1.02	.17	S06	-	K06	-	-
SIR 0265 K08CB	8	.31	.26	.31	5.0	1.22	.21	S08	-	K08	-	-
SIR 0310K08UCB	8U	.31	.29	.35	5.0	1.38	.26	S08	-	K08	-	-
SIR 0375 M11CB	11	.38	.38	.47	6.0	-	.28	S11	-	K11	-	-
SIR 0500 P11CB	11	.50	.50	.58	7.0	-	.34	S11	-	K11	-	-
SIR 0500 P16CB	16	.50	.50	.64	7.0	-	.40	S16S	-	K16	-	-
SIR 0625 R16CB	16	.62	.62	.75	8.0	-	.46	S16S	-	K16	-	-
*SIR 0750 S16CB	16	.75	.75	.90	10.0	-	.54	S16	A16	K16	AI16	AE16
*SIR 1000 S16CB	16	1.00	1.00	1.10	10.0	-	.64	S16	A16	K16	AI16	AE16

*Carbide shank Threading bars with anvil


For **LEFT HAND** toolholders specify **SIL** instead of **SIR**


Drophead Toolholders

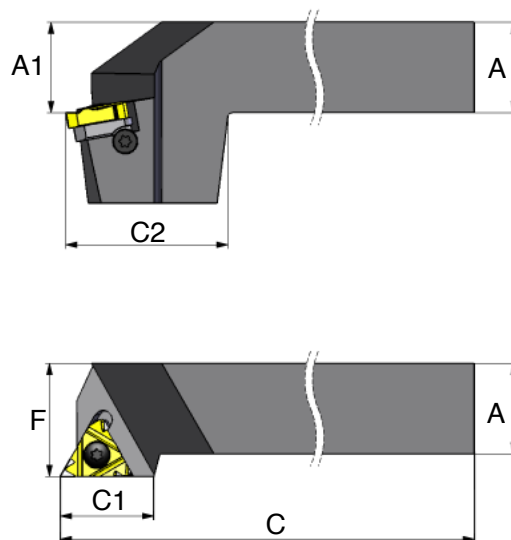

Ordering Code Right Hand	 L mm	A	A1	C	C1	F	C2	Insert Screw	Anvil Screw	Torx Key	RH Anvil	LH Anvil
SER 0750 K16D	16	.75	.75	5.0	.84	1.00	1.5	S16	A16	K16	AE16	AI16
SER 1000 M16D	16	1.00	1.00	6.0	.84	1.25	1.5	S16	A16	K16	AE16	AI16
SER 1000 M22D	22	1.00	1.00	6.0	1.00	1.25	1.5	S22	A22	K22	AE22	AI22

Vertical Toolholders

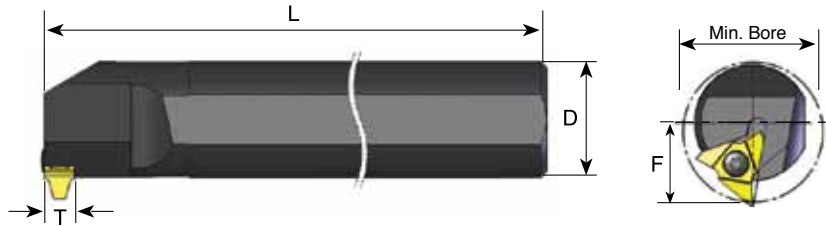



Ordering Code Right Hand	 L	D	* Min Bore Diam.	L	F	T	Insert Screw	Torx Key
SIR 1250 S27V-T10	27	1.25	1.65	10	0.94	0.41	S27	K27
SIR 1500 T27V-T10	27	1.5	1.80	12	1.05	0.41	S27	K27
SIR 2000 U27V-T10	27	2.0	2.32	14	1.31	0.41	S27	K27
SIR 2500 V27V-T10	27	2.5	2.85	16	1.51	0.41	S27	K27


For **LEFT HAND** toolholders specify **SIL** instead of **SIR**

* To be compared with given minimum bore profile.

Gang Toolholders

Gang Toolholders are External Holders, used in small automatic machines with a gangtool post.

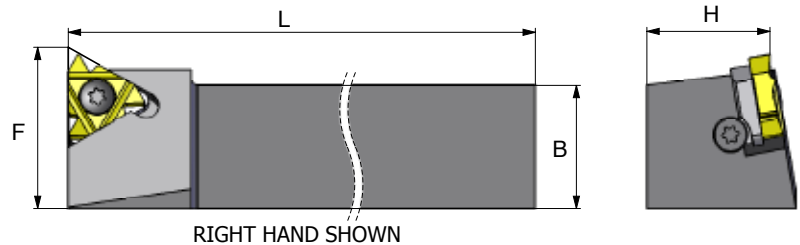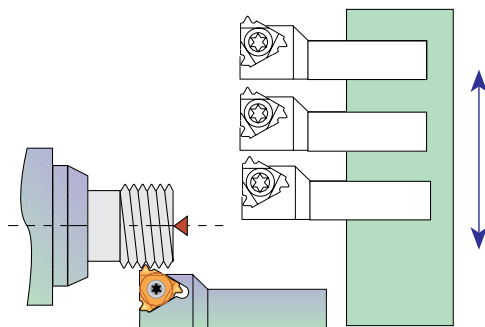

Ordering Code Right Hand	 L	B=H mm	L mm	F mm	Insert Screw	Anvil Screw	Torx Key	RH Anvil	LH Anvil
*SER 8 8 H11G	11	8	100	12.0	S11	-	K11	-	-
*SER 10 10 H11G	11	10	100	14.0	S11	-	K11	-	-
SER 16 16 K16G	16	16	125	21.7	S16	A16	K16	AE16	AI16
SER 20 20 K16G	16	20	125	26.2	S16	A16	K16	AE16	AI16


*Toolholders with no anvil


For **LEFT HAND** toolholders specify **SEL** instead of **SER**

Quick Change Polygon Threading Toolholders

- Polygon shank
- ISO standard (26623) compliant for toolholding systems
- Polygon taper ensures automatic radial centering and even pressure around the coupling
- ISO standard coupling system with a 1.4 degree tapered polygon shank design enables quick tool changes
- Interchangeable with leading manufacturers


External Toolholders

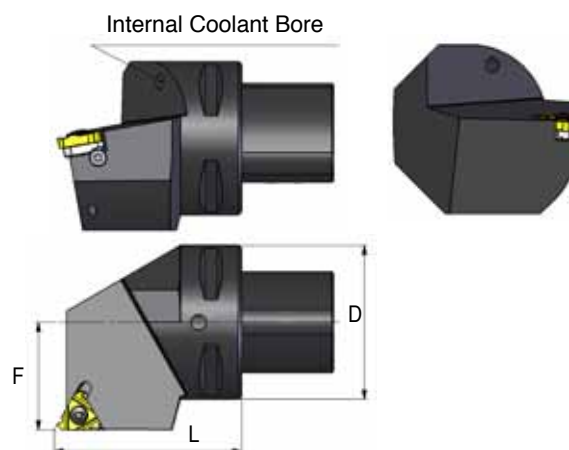


Equivalent to...	Ordering Code		D	F	L	Insert Screw	Anvil Screw	Torx key	RH Anvil	LH Anvil
C4	P40-SER 27050-16	16	1.575	1.063	1.969	S16	A16	K16	AE16	AI16
C5	P50-SER 35060-16	16	1.969	1.378	2.362	S16	A16	K16	AE16	AI16
C6	P63-SER 45065-16	16	2.480	1.772	2.559	S16	A16	K16	AE16	AI16
C4	P40-SER 27050-22	22	1.575	1.063	1.969	S22	A22	K22	AE22	AI22
C5	P50-SER 35060-22	22	1.969	1.378	2.362	S22	A22	K22	AE22	AI22
C6	P63-SER 45065-22	22	2.480	1.772	2.559	S22	A22	K22	AE22	AI22
C8	P80-SER 55080-22	22	3.150	2.165	3.150	S22	A22	K22	AE22	AI22

For **LEFT HAND** toolholders specify **SEL** instead of **SER**

Internal Toolholders

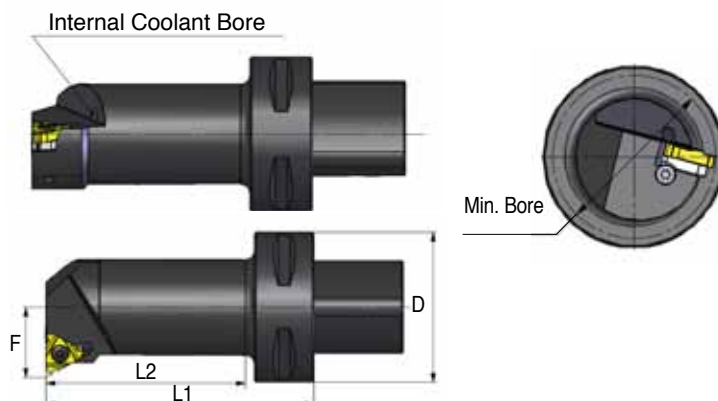



Equivalent to...	Ordering Code		D	F	Min. Bore Dia.	L1	L2	Insert Screw	Anvil Screw	Torx key	RH Anvil	LH Anvil
C4	* P40-SIR 12060-16	16	1.575	0.461	0.787	2.362	1.457	S16	-	K16	-	-
	P40-SIR 14060-16	16	1.575	0.531	0.984	2.362	1.496	S16	A16	K16	AI16	AE16
	P40-SIR 17070-16	16	1.575	0.630	1.142	2.756	1.890	S16	A16	K16	AI16	AE16
	P40-SIR 22090-16	16	1.575	0.768	1.417	3.543	2.717	S16	A16	K16	AI16	AE16
	P40-SIR 27080-16	16	1.575	0.925	1.732	3.150	2.362	S16	A16	K16	AI16	AE16
C5	* P50-SIR 12060-16	16	1.969	0.461	0.787	2.362	1.378	S16	-	K16	-	-
	P50-SIR 14060-16	16	1.969	0.531	0.984	2.362	1.417	S16	A16	K16	AI16	AE16
	P50-SIR 17070-16	16	1.969	0.630	1.142	2.756	1.850	S16	A16	K16	AI16	AE16
	P50-SIR 22090-16	16	1.969	0.768	1.417	3.543	2.677	S16	A16	K16	AI16	AE16
	P50-SIR 27105-16	16	1.969	0.925	1.732	4.134	3.307	S16	A16	K16	AI16	AE16
C6	P63-SIR 14070-16	16	2.480	0.531	0.984	2.756	1.654	S16	A16	K16	AI16	AE16
	P63-SIR 17075-16	16	2.480	0.630	1.142	2.953	1.890	S16	A16	K16	AI16	AE16
	P63-SIR 22090-16	16	2.480	0.768	1.417	3.543	2.520	S16	A16	K16	AI16	AE16
	P63-SIR 27105-16	16	2.480	0.925	1.732	4.134	3.150	S16	A16	K16	AI16	AE16
C4	* P40-SIR 15065-22	22	1.575	0.606	0.984	2.559	1.654	S22	-	K22	-	-
	P40-SIR 19070-22	22	1.575	0.705	1.142	2.756	1.890	S22	A22	K22	AI22	AE22
	P40-SIR 22090-22	22	1.575	0.843	1.496	3.543	2.717	S22	A22	K22	AI22	AE22
	P40-SIR 27080-22	22	1.575	1.000	1.811	3.150	2.362	S22	A22	K22	AI22	AE22
C5	* P50-SIR 15065-22	22	1.969	0.606	0.984	2.559	1.614	S22	-	K22	-	-
	P50-SIR 19070-22	22	1.969	0.705	1.142	2.756	1.850	S22	A22	K22	AI22	AE22
	P50-SIR 22090-22	22	1.969	0.843	1.496	3.543	2.677	S22	A22	K22	AI22	AE22
	P50-SIR 27105-22	22	1.969	1.000	1.811	4.134	3.307	S22	A22	K22	AI22	AE22
C6	P63-SIR 19075-22	22	2.480	0.705	1.142	2.953	1.890	S22	A22	K22	AI22	AE22
	P63-SIR 22090-22	22	2.480	0.843	1.496	3.543	2.520	S22	A22	K22	AI22	AE22
	P63-SIR 27105-22	22	2.480	1.000	1.811	4.134	3.150	S22	A22	K22	AI22	AE22

For **LEFT HAND** toolholders specify **SIL** instead of **SIR**

* Holders without anvil

Special Thread Turning Applications

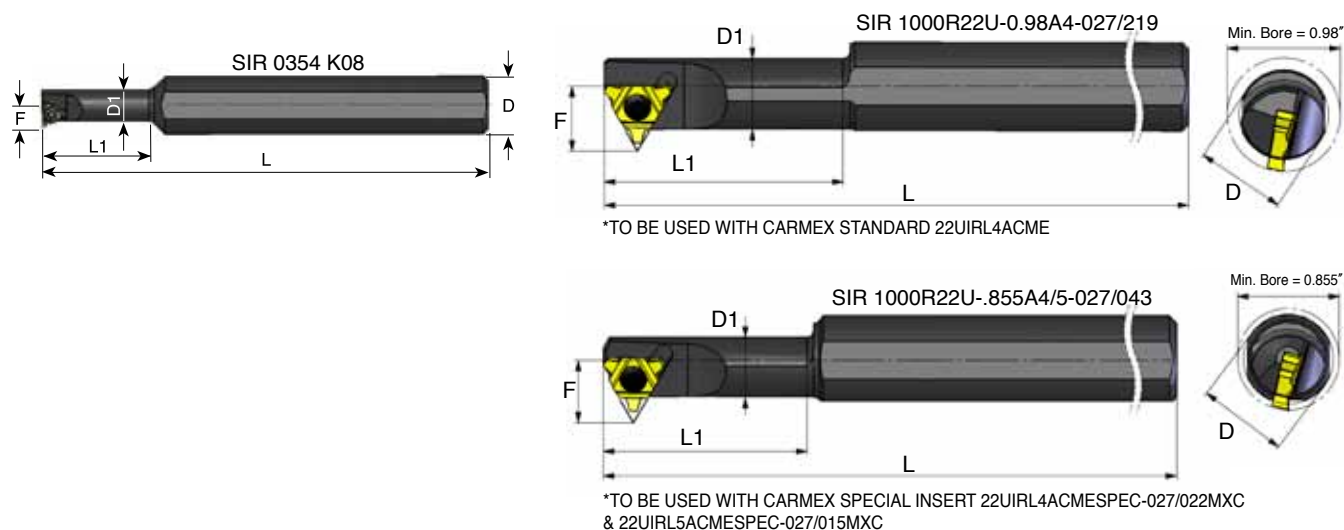


Ordering Code Right Hand		D	D1	L	L1	F	Thread	Insert Screw	Torx Key
*SIR 0354 K08	8	0.63	0.34	5	1.18	0.25	1/2 - 13UNC	S08	K08
SIR 1000 R22U-0.98A4-027/219	22U	1.00	0.79	8	2.75	0.72	—	S22	K22
SIR 1000 R22U-855A4/5-027/043	22U	1.00	0.67	8	2.00	0.70	—	S22	K22

For LH holders call Carmex

* Only right hand available

Large Profile Range



- Pitch Range: 14mm up to 24 mm.
- Tools and inserts are offered as specials (non catalog), because each holder has to be modified to fit the profile shape.
- Rigid Clamping.

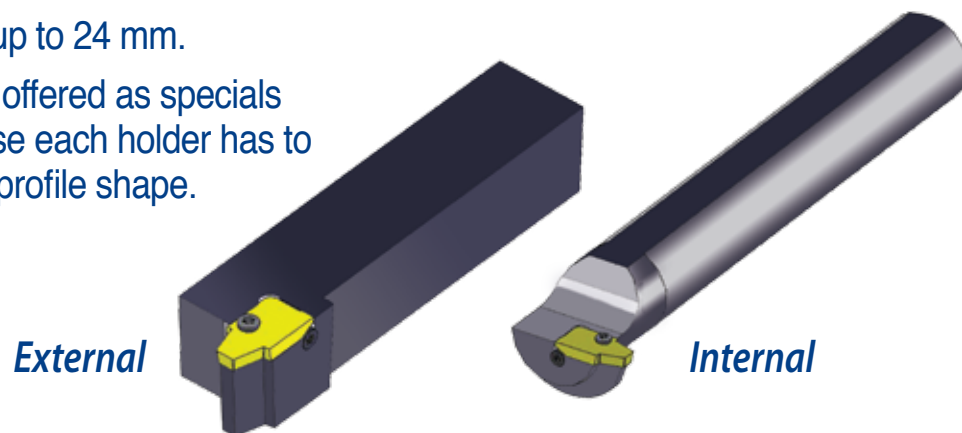

- Tailor made profiles according to customer's request

Available Profile	Round (DIN 20400)	Trapez (DIN 103)	Acme, Stub Acme	American Buttress
Pitch	16 mm	14-24 mm	1.0 - 1.5 TPI	1.5 - 2.0 TPI


Thread Helix Angle

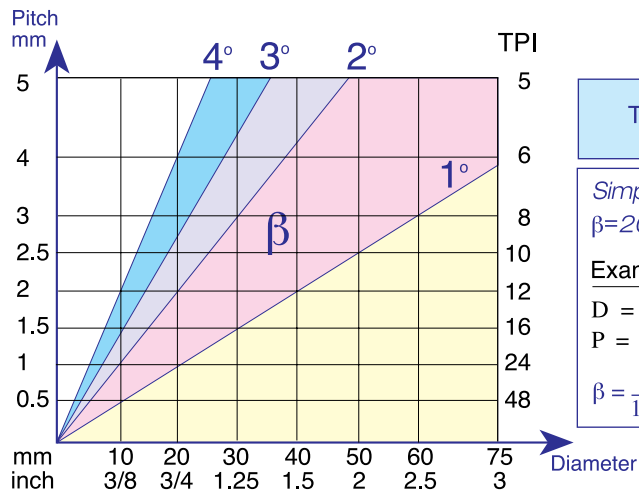

Standard and Slanted Anvils

CARMEX Toolholder Pockets have a built in 1.5° helix angle. This angle may be adjusted to better match the thread helix angle by simply changing the anvil.

Negative helix is usually used when threading RH thread with LH Holder or LH thread with RH Holder.

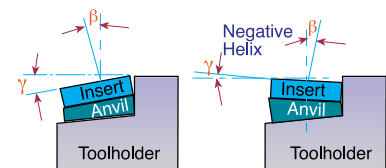

L mm	IC	Pocket Angle γ	4.5°	3.5°	2.5°	1.5° Standard	0.5°	-0.5°	-1.5°
16	3/8	EX-RH OR IN-LH	AE16+4.5	AE16+3.5	AE16+2.5	AE16	AE16+0.5	AE16-0.5	AE16-1.5
16	3/8	EX-LH OR IN-RH	AI 16+4.5	AI 16+3.5	AI 16+2.5	AI 16	AI 16+0.5	AI 16-0.5	AI 16-1.5
22	1/2	EX-RH OR IN-LH	AE22+4.5	AE22+3.5	AE22+2.5	AE22	AE22+0.5	AE22-0.5	AE22-1.5
22	1/2	EX-LH OR IN-RH	AI 22+4.5	AI 22+3.5	AI 22+2.5	AI 22	AI 22+0.5	AI 22-0.5	AI 22-1.5
22U	1/2U	EX-RH OR IN-LH	AE22U+4.5	AE22U+3.5	AE22U+2.5	AE22U	AE22U+0.5	AE22U-0.5	AE22U-1.5
22U	1/2U	EX-LH OR IN-RH	AI 22U+4.5	AI 22U+3.5	AI 22U+2.5	AI 22U	AI 22U+0.5	AI 22U-0.5	AI 22U-1.5
27	5/8	EX-RH OR IN-LH	AE27+4.5	AE27+3.5	AE27+2.5	AE27	AE27+0.5	AE27-0.5	AE27-1.5
27	5/8	EX-LH OR IN-RH	AI 27+4.5	AI 27+3.5	AI 27+2.5	AI 27	AI 27+0.5	AI 27-0.5	AI 27-1.5
27U	5/8U	EX-RH OR IN-LH	AE27U+4.5	AE27U+3.5	AE27U+2.5	AE27U	AE27U+0.5	AE27U-0.5	AE27U-1.5
27U	5/8U	EX-LH OR IN-RH	AI 27U+4.5	AI 27U+3.5	AI 27U+2.5	AI 27U	AI 27U+0.5	AI 27U-0.5	AI 27U-1.5

Anvil Kits

5 AE and 5 AI anvils with various helix angles



AE (FOR EX.RH. & IN.LH.)



AI (FOR IN.RH. & EX.LH.)



Ordering Code	Contents				
KA16	AE16+4.5	AE16+3.5	AE16+2.5	AE16+0.5	AE16-1.5
	AI 16+4.5	AI 16+3.5	AI 16+2.5	AI 16+0.5	AI 16-1.5
KA22	AE22+4.5	AE22+3.5	AE22+2.5	AE22+0.5	AE22-1.5
	AI 22+4.5	AI 22+3.5	AI 22+2.5	AI 22+0.5	AI 22-1.5
KA22U	AE22U+4.5	AE22U+3.5	AE22U+2.5	AE22U+0.5	AE22U-1.5
	AI 22U+4.5	AI 22U+3.5	AI 22U+2.5	AI 22U+0.5	AI 22U-1.5
KA27	AE27+4.5		AE27+2.5		AE27-1.5
	AI 27+4.5		AI 27+2.5		AI 27-1.5
KA27U	AE27U+4.5		AE27U+2.5		AE27U-1.5
	AI 27U+4.5		AI 27U+2.5		AI 27U-1.5

Standard Kits

Threading Kits are a versatile solution for users that cut a variety of thread types in limited quantity and do not want to sacrifice thread quality.

External UN Kit Ordering Code:KEU

INSERTS

16 ER A60 P25C
16 ER G60 P25C
16 ER AG60 P25C
16 ER 8 UN P25C
16 ER 12 UN P25C
16 ER 14 UN P25C
16 ER 16 UN P25C
16 ER 18 UN P25C
16 ER 20 UN P25C
16 ER 24 UN P25C

TOOLHOLDERS

SER 0750 K16
KEY
K16
SCREW
S16

Internal UN Kit Ordering Code:KIU

INSERTS

16 IR A60 P25C
16 IR G60 P25C
16 IR AG60 P25C
16 IR 8 UN P25C
16 IR 12 UN P25C
16 IR 14 UN P25C
16 IR 16 UN P25C
16 IR 18 UN P25C
16 IR 20 UN P25C
16 IR 24 UN P25C

TOOLHOLDERS

SIR 0750 P16
KEY
K16
SCREW
S16



If a larger toolholders with a 1.0 inch shank is required, add to the kit 1.0. For example: KIU - 1.0

Miniature & Ultra-miniature Kits




Ordering Code	Type	No. of Inserts	Inserts	Contents Boring Bar	Key
KU60I - BXC	ULTRA	10	06 IR A60 BXC	SIR 0205 H06	K6
KM60I - BXC	MINI	10	08 IR A60 BXC	SIR 0265 K08	K8

Inserts Kits

Type B Kits

Type B threading inserts.
A combination of ground profile and sintered chip-breaker threading inserts.
BMA Grade: Sub-Micron carbide grade with TiAlN multi-Layer Coating.

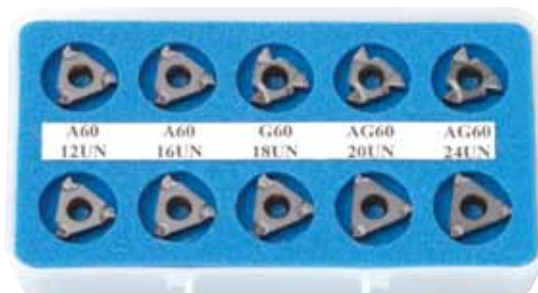

EXTERNAL UN KIT KEUB - BMA

16 ER B A60 BMA-2 Pcs
16 ER B G60 BMA-1 Pcs
16 ER B AG60 BMA-2 Pcs
16 ER B 12 UN BMA-1 Pcs
16 ER B 16 UN BMA-1 Pcs
16 ER B 18 UN BMA-1 Pcs
16 ER B 20 UN BMA-1 Pcs
16 ER B 24 UN BMA-1 Pcs



EX-RH

INTERNAL UN KIT KIUB - BMA

16 IR B A60 BMA-2 Pcs
16 IR B G60 BMA-1 Pcs
16 IR B AG60 BMA-2 Pcs
16 IR B 12 UN BMA-1 Pcs
16 IR B 16 UN BMA-1 Pcs
16 IR B 18 UN BMA-1 Pcs
16 IR B 20 UN BMA-1 Pcs
16 IR B 24 UN BMA-1 Pcs



IN-RH

Standard Inserts Kits


EXTERNAL ISO KIT

16 ER 1.0 ISO-2 Pcs
16 ER 1.25 ISO-2 Pcs
16 ER 1.5 ISO-2 Pcs
16 ER 1.75 ISO-2 Pcs
16 ER 2.0 ISO-2 Pcs


INTERNAL ISO KIT

16 IR 1.0 ISO-2 Pcs
16 IR 1.25 ISO-2 Pcs
16 IR 1.5 ISO-2 Pcs
16 IR 1.75 ISO-2 Pcs
16 IR 2.0 ISO-2 Pcs

Ordering Code: KEM



Ordering Code: KIM



Threading & Boring Combination Kit

A practical and convenient combination kit for **Ultra Miniature** Threading and Boring. It enables Boring and Threading of mini bores as small as **1/4" diameter** with just one deep reaching CARBIDE shank ultra mini Boring Bar.



Ordering Code	Contents			
	Threading Insert	Turning Inserts	Boring Bar	Key
KC6TI	06 IR A60 BXC 10Pcs	06 IR TURN BMA 10Pcs	SIR 0205 H06CB	K6

- BMA** - Coated carbide grade for medium to high cutting speeds
- BXC** - Coated carbide grade for low cutting speed - 130 to 300 ft/min
- CB** - Carbide shank boring bar with coolant bore